




AIR - POWERED DOCKLEVELLER STANDARD PIT DETAIL

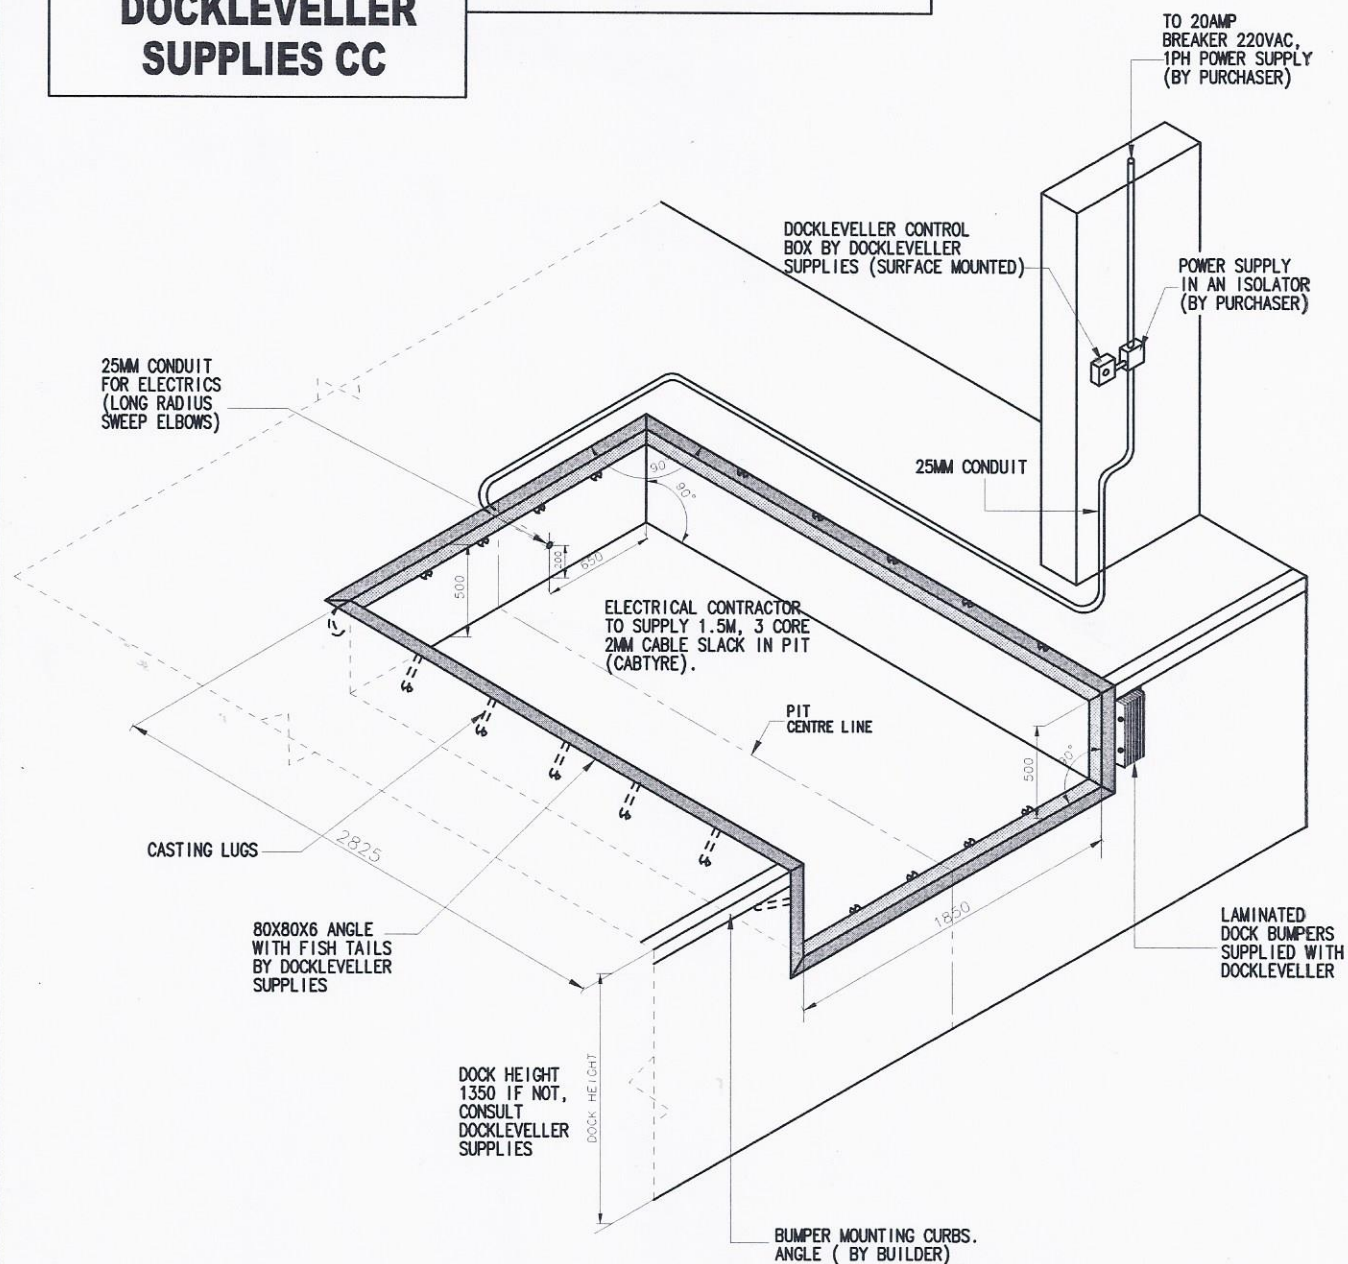

PIT LENGTH	2825MM	CONSTRUCTION 80X80X6
PIT WIDTH	1850MM	ANGLE C/W TIES
PIT DEPTH (FRONT)	500MM	MAY BE 500-520MM ANY
PIT DEPTH (REAR)	500MM	DIFFERENT COULD RESULT
ELECTRICAL SUPPLY POSITION	650MM	IN ADJUSTMENTS, TO PIT
	200MM	25MM CONDUIT TO
		CONTROL
DOCK HEIGHT	1350MM	MINIMUM SUBJECT TO
		VEHICLE HEIGHT

- BUILDER TO**
- 1) INSTALL PIT FRAME SUPPLIED BY DOCKLEVELLER SUPPLIES.
 - 2) CONDUIT / ISOLATOR / POWER SUPPLY, SUPPLIED BY PURCHASER AND INSTALLED PRIOR TO INSTALLATION OF DOCKLEVELLER.
 - 3) BUILDER TO INSURE PIT IS BUILT SQUARE / WALLS VERTICAL AND FLOOR AT CORRECT HEIGHT. (MINIMUM 490MM MAXIMUM 510MM)

Material		JOB	DOCKLEVELLER
		PART NO.	CASTING PIT FRAME
Scale	NOT TO SCALE	Date	
NOTES:		DOCKLEVELLER SUPPLIES CO	