


**DOCKLEVELLER
SUPPLIES CC**

PIT FRAME. 2150 WIDE

**AIR - POWERED DOCKLEVELLER
STANDARD PIT DETAIL**

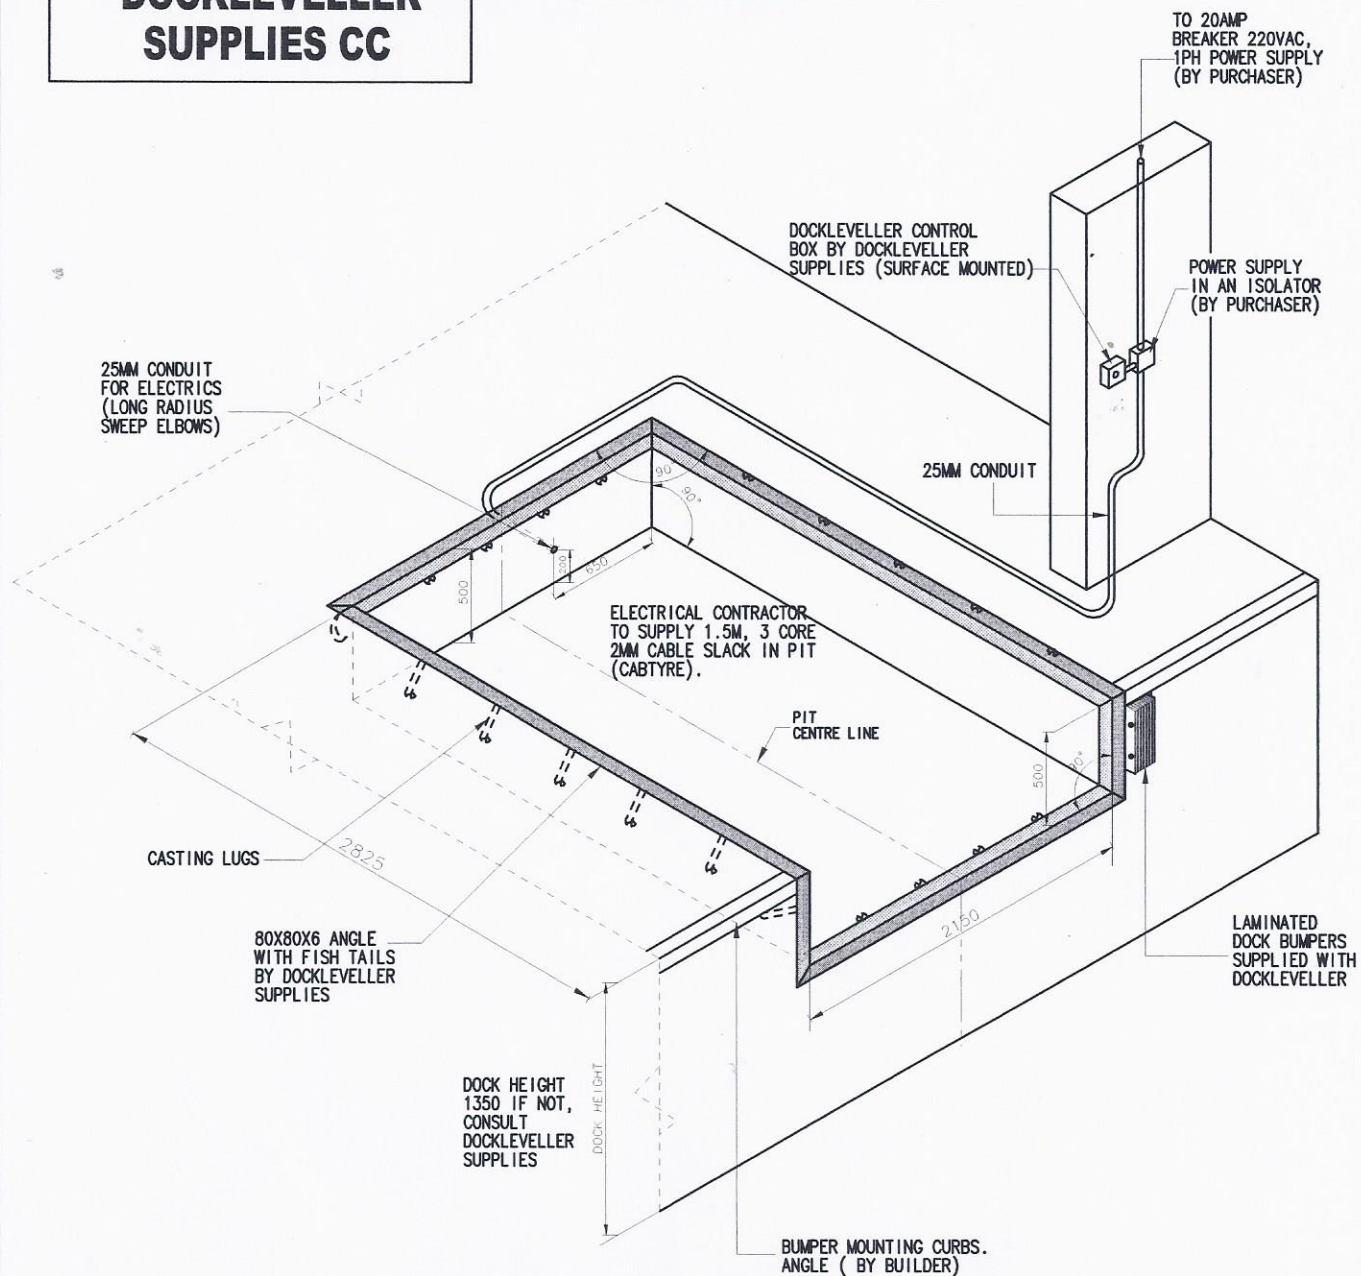

PIT DETAILS FOR CONSTRUCTION PURPOSES

PIT LENGTH	2825MM	CONSTRUCTION 80X80X6 ANGLE C/W TIES
PIT WIDTH	2150MM	
PIT DEPTH (FRONT)	500MM	MAY BE 500-520MM ANY DIFFERENT COULD RESULT IN ADJUSTMENTS, TO PIT
PIT DEPTH (REAR)	500MM	
ELECTRICAL SUPPLY POSITION	650MM	25MM CONDUIT TO CONTROL
	200MM	
DOCK HEIGHT	1350MM	MINIMUM SUBJECT TO VEHICLE HEIGHT

IMPORTANT NOTES

BUILDER TO

- 1) INSTALL PIT FRAME SUPPLIED BY DOCKLEVELLER SUPPLIES.
- 2) CONDUIT / ISOLATOR / POWER SUPPLY, SUPPLIED BY PURCHASER AND INSTALLED PRIOR TO INSTALLATION OF DOCKLEVELLER.
- 3) BUILDER TO INSURE PIT IS BUILT SQUARE / WALLS VERTICAL AND FLOOR AT CORRECT HEIGHT. (MINIMUM 490MM MAXIMUM 510MM)

Material	JOB	DOCKLEVELLER
Scale	PART NO.	CASTING PIT FRAME
NOTES:	Date	
		DOCKLEVELLER SUPPLIES CC